


Legend:

1. Crushed stone or washed gravel (8 to 15 cm uniform-size stone). Approximately 0.6 m thick.
2. Geotextile filter fabric.
3. Common borrow fill. Thickness varies from 0 to 1 m.
4. Low-permeability cap. Group approximately 1.3 m thick.
5. Topsoil. Approximately 0.6 m thick.
6. Remove existing dike and use as fill where needed.

Figure F-3. Typical Basin Backfill Details of SRL Seepage Basins

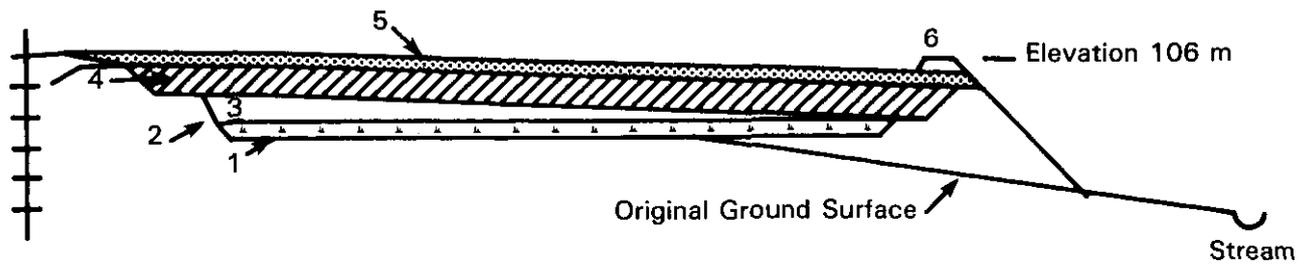

Legend:

1. Crushed stone or washed gravel (8 to 15 cm uniform-size stone). Approximately 0.6 m thick.
2. Geotextile fiber fabric.
3. Common borrow fill. Thickness varies from 0 to 1 m.
4. Low-permeability cap. Group approximately 1.3 m thick.
5. Topsoil. Approximately 0.6 m thick.
6. Remove existing dike and use as fill where needed.

Figure F-4. Backfill Details for SRL Seepage Basin 4